

TECHNICAL SPECIFICATION SHEET

ALDO Access Panels



The ALDO access panel is a economical and well-priced metal door used to provide access to building services. The ALDO access panel has the versatility to be specified with insulation, fire rating, acoustic reduction making it a firm favourite access panel choice for contractors and specifiers alike.

A revolutionary, spring-loaded, invisible keyhole system comes as standard with the ALDO access panel and it also features full-length piano hinges on the large panels and CISCO's unique pivot hinges on the smaller panels.



FIRE RATED

Fire tested for up to 2 hours to BS476 Part 22.



ACOUSTIC RATED

Acoustic rating 0 - 35dB Empty Door Tray or 36dB - 38dB 1 layer of plaster board to Door Tray . Tested to BS EN ISO 10140-2:2010.



AIR TIGHT

At 25 Pa the leakage rate is 0.47m³/h.m² tested to BS EN 1634-3: 2000.



POWDER COATED

Durable powder coated finish in any (RAL9010 white is standard). The door and frame can be over-painted to match the surround.



PICTURE FRAME

For finished surfaces cover the cut edge of the aperture with this frame type.




BEADED FRAME

For the minimalist look, skim or tape & joint this frame into the surface.




SPRING LOADED T-KEY LATCH SYSTEM

Ask for our "Spring Loaded Invisible Keyhole"



INSULATED

Insulated to meet a Building Regulation target of 0.35 u-value.




TECHNICAL SPECIFICATION SHEET

ALDO Access Panels



CONFIGURATIONS & SIZES

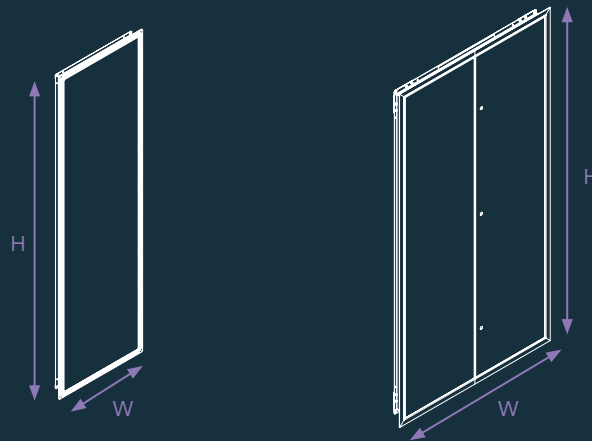


Single

mm	Min	Max
Height	150	1930
Width	150	850


Double

mm	Min	Max
Height	300	2200
Width	690	1500

FRAME OPTIONS

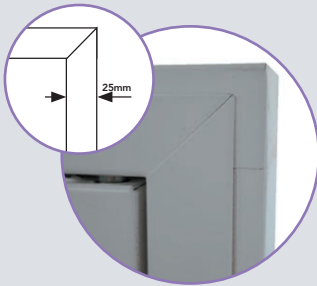


25mm Flat Picture Frame Surround

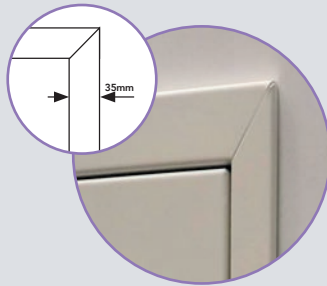


35mm Return Picture Frame Surround




35mm Plaster Stop Frame Surround

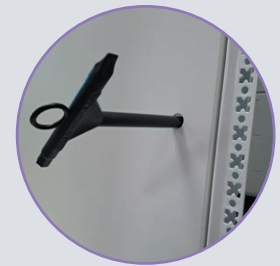

Locking

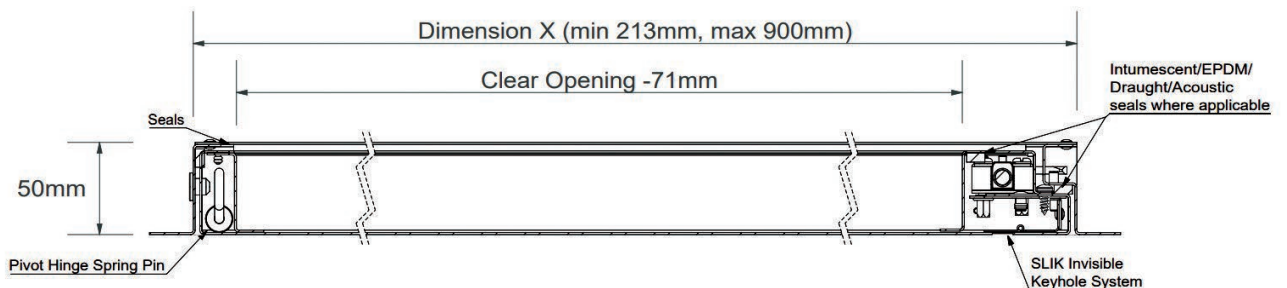

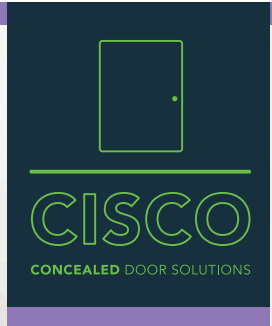

TECHNICAL SPECIFICATION SHEET

ALDO² Access Panels



The ALDO² access panel is a economical and well-priced metal door used to provide access to building services. The ALDO² access panel has the versatility to be specified with insulation, fire rating, acoustic reduction making it a firm favourite access panel choice for contractors and specifiers alike.

A revolutionary, spring-loaded, invisible keyhole system comes as standard with the ALDO² access panel and features CISCO's unique pivot hinges.



FIRE RATED

Fire tested for up to 2 hours to BS476 Part 22.



ACOUSTIC RATED

Acoustic rating 0 - 35dB Empty Door Tray or 36dB - 38dB 1 layer of plaster board to Door Tray . Tested to BS EN ISO 10140-2:2010.



AIR TIGHT

At 25 Pa the leakage rate is 0.47m³/h.m² tested to BS EN 1634-3: 2000.



POWDER COATED

Durable powder coated finish in any (RAL9010 white is standard). The door and frame can be over-painted to match the surround.



PICTURE FRAME

For finished surfaces cover the cut edge of the aperture with this frame type.




BEADED FRAME

For the minimalist look, skim or tape & joint this frame into the surface.



SPRING LOADED T-KEY LATCH SYSTEM

With additional security of euro cylinder locking



INSULATED

Insulated to meet a Building Regulation target of 0.35 u-value.




TECHNICAL SPECIFICATION SHEET

ALDO² Access Panels



CONFIGURATIONS & SIZES

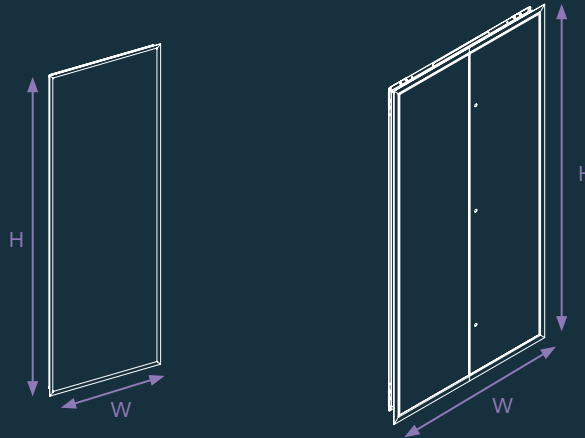

Single

mm	Min	Max
Height	300	2200
Width	213	900


Double

mm	Min	Max
Height	300	1900 / 2513
Width	500	2048 / 1548

FRAME OPTIONS




25mm Flat Picture Frame Surround

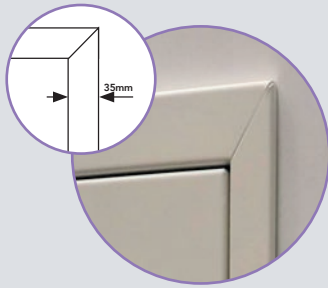

35mm Return Picture Frame Surround



35mm Plaster Stop Frame Surround

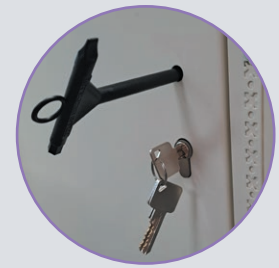

Concealed T-Key + cylinder security locking

